




# haasLEUCHTEN AQUA Tri-Proof Luminaires

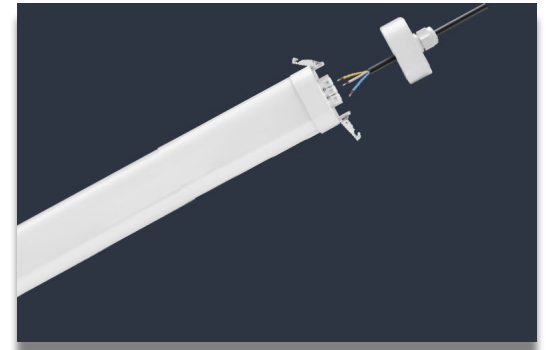

# haasLEUCHTEN AQUA specs

Luminous efficacy: 130lm/W

Power adjustable variants / Built-in sensor variants / Emergency variants

Power variants:

- 60W (power adjustable variant adjustable to 60-50-40-30W)
- 40W (power adjustable variant adjustable to 40-30-25-20W)
- 20W (power adjustable variant adjustable to 20-17-14-10W)

Lumen output:

- 7800lm (60W) / 5200lm (40W) / 2600lm (20W)

Length:

- 1500mm / 1200mm / 600mm

Color temperature variants:

- 3000K / 4000K / 6500K

Rated life:

- 50kh


Warranty:

- 5 years

Ingress protection:

- IP65

Through wiring

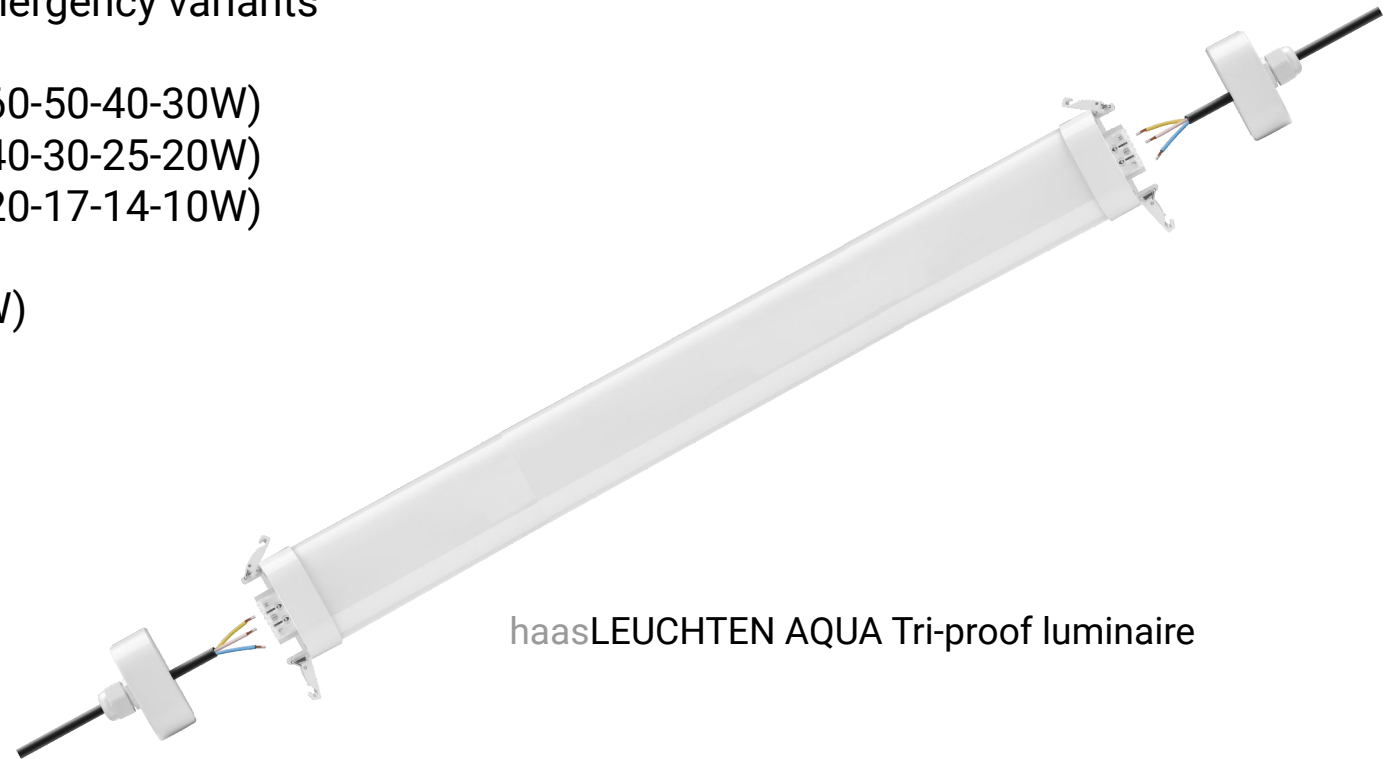

haasLEUCHTEN AQUA Tri-proof luminaire

# haasLEUCHTEN AQUA SKUs

SKU	Model	Dimensions (L x W x H) (mm)	Input power (W)	Luminuos flux (lm)	Colour temperature (K)	Version
306010201	HS-HL-TP-1500-60-P-4K-01	1502*74*64	60	7800	4000	Power adjustable
306011201	HS-HL-TP-1500-60-P-3K-01	1502*74*64	60	7800	3000	Power adjustable
306012201	HS-HL-TP-1500-60-P-6.5K-01	1502*74*64	60	7800	6500	Power adjustable
306013201	HS-HL-TP-1200-40-P-4K-01	1221*74*64	40	5200	4000	Power adjustable
306014201	HS-HL-TP-1200-40-P-3K-01	1221*74*64	40	5200	3000	Power adjustable
306015201	HS-HL-TP-1200-40-P-6.5K-01	1221*74*64	40	5200	6500	Power adjustable
306016201	HS-HL-TP-600-20-P-4K-01	659*74*64	20	2600	4000	Power adjustable
306017201	HS-HL-TP-600-20-P-3K-01	659*74*64	20	2600	3000	Power adjustable
306018201	HS-HL-TP-600-20-P-6.5K-01	659*74*64	20	2600	6500	Power adjustable

# haasLEUCHTEN AQUA SKUs

SKU	Model	Dimensions (L x W x H) (mm)	Input power (W)	Luminuos flux (lm)	Colour temperature (K)	Version
306019201	HS-HL-TP-1500-60-S-4K-01	1502*74*64	60	7800	4000	Built-in sensor
306020201	HS-HL-TP-1500-60-S-3K-01	1502*74*64	60	7800	3000	Built-in sensor
306021201	HS-HL-TP-1500-60-S-6.5K-01	1502*74*64	60	7800	6500	Built-in sensor
306022201	HS-HL-TP-1200-40-S-4K-01	1221*74*64	40	5200	4000	Built-in sensor
306023201	HS-HL-TP-1200-40-S-3K-01	1221*74*64	40	5200	3000	Built-in sensor
306024201	HS-HL-TP-1200-40-S-6.5K-01	1221*74*64	40	5200	6500	Built-in sensor
306025201	HS-HL-TP-600-20-S-4K-01	659*74*64	20	2600	4000	Built-in sensor
306026201	HS-HL-TP-600-20-S-3K-01	659*74*64	20	2600	3000	Built-in sensor
306027201	HS-HL-TP-600-20-S-6.5K-01	659*74*64	20	2600	6500	Built-in sensor

# haasLEUCHTEN AQUA SKUs

SKU	Model	Dimensions (L x W x H) (mm)	Input power (W)	Luminuos flux (lm)	Colour temperature (K)	Version
306010201	HS-HL-TP-1500-60-P-4K-01	1502*74*64	60	7800	4000	Power adjustable
306011201	HS-HL-TP-1500-60-P-3K-01	1502*74*64	60	7800	3000	Power adjustable
306012201	HS-HL-TP-1500-60-P-6.5K-01	1502*74*64	60	7800	6500	Power adjustable
306013201	HS-HL-TP-1200-40-P-4K-01	1221*74*64	40	5200	4000	Power adjustable
306014201	HS-HL-TP-1200-40-P-3K-01	1221*74*64	40	5200	3000	Power adjustable
306015201	HS-HL-TP-1200-40-P-6.5K-01	1221*74*64	40	5200	6500	Power adjustable
306016201	HS-HL-TP-600-20-P-4K-01	659*74*64	20	2600	4000	Power adjustable
306017201	HS-HL-TP-600-20-P-3K-01	659*74*64	20	2600	3000	Power adjustable
306018201	HS-HL-TP-600-20-P-6.5K-01	659*74*64	20	2600	6500	Power adjustable

# haasLEUCHTEN AQUA SKUs


---

306010201:	HS-HL-TP-1500-60-P-4K-01
306011201:	HS-HL-TP-1500-60-P-3K-01
306012201:	HS-HL-TP-1500-60-P-6.5K-01
306013201:	HS-HL-TP-1200-40-P-4K-01
306014201:	HS-HL-TP-1200-40-P-3K-01
306015201:	HS-HL-TP-1200-40-P-6.5K-01
306016201:	HS-HL-TP-600-20-P-4K-01
306017201:	HS-HL-TP-600-20-P-3K-01
306018201:	HS-HL-TP-600-20-P-6.5K-01
306019201:	HS-HL-TP-1500-60-S-4K-01
306020201:	HS-HL-TP-1500-60-S-3K-01
306021201:	HS-HL-TP-1500-60-S-6.5K-01
306022201:	HS-HL-TP-1200-40-S-4K-01
306023201:	HS-HL-TP-1200-40-S-3K-01
306024201:	HS-HL-TP-1200-40-S-6.5K-01
306025201:	HS-HL-TP-600-20-S-4K-01
306026201:	HS-HL-TP-600-20-S-3K-01
306027201:	HS-HL-TP-600-20-S-6.5K-01



haasLEUCHTEN AQUA Tri-proof luminaire

# haasLEUCHTEN AQUA

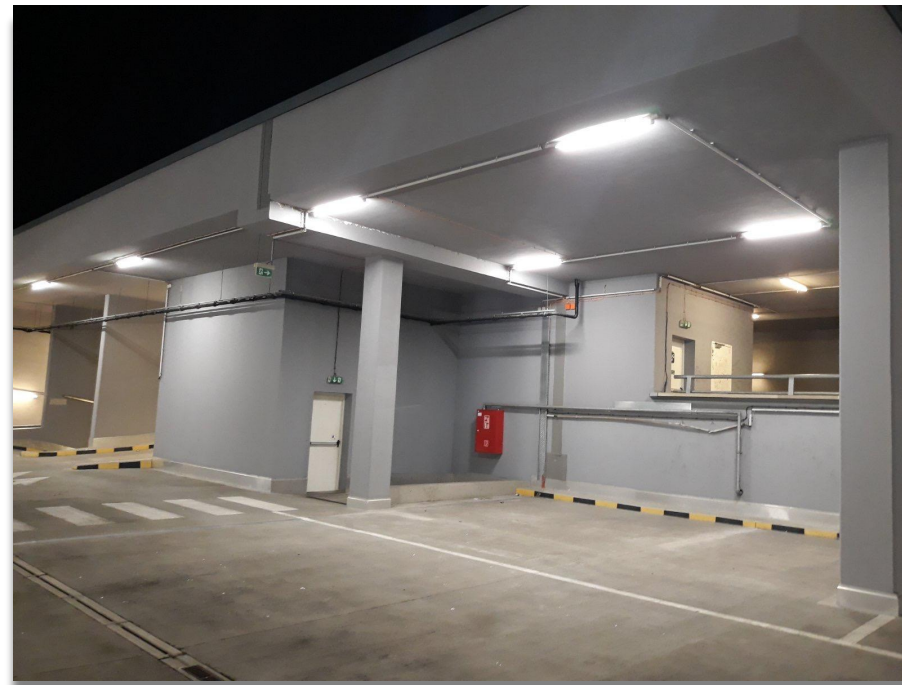

haasLEUCHTEN AQUA - KÖKI Terminal Budapest