


DATASHEET




N E R I A 4 0 0

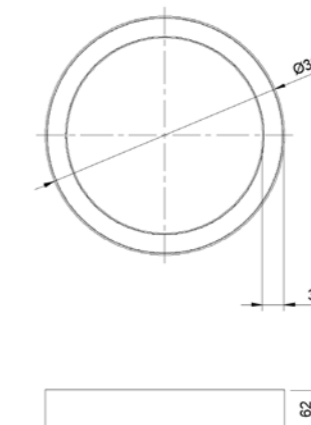

PRODUCT DATA

Size : 393 x 393 x 62 mm
 Weight : 3,2 kg
 Materials : Housing : Aluminium
 Optic: PMMA
 Optic : Satinated diffusor
 Light distribution : Direct 60 % , Indirect 40 %
 Driver : FIX, DALI, Bluetooth (behind or on the ceiling)
 Ambient temperature : 0 / + 35 °C
 Lifetime : L80B10 - 60 000 hours
 IP Rating: IP 20, IP 65 on request
 Installation : suspended
 Wire lengths : 1500mm
 DALI addresses : 1
 Visual comfort : UGR <19

NERIA 400 LED



COLOR OPTIONS



TECHNICAL SPECIFICATION

CODE	POWER	CRI	CCT	LUMEN
CRI400x62DUAL	32 W	> 90	3000 K	2840 lm
CRI400x62DUAL	32 W	> 90	4000 K	2976 lm
CRI400x62DUAL	32 W	> 90	TW (2700 - 6500 K)	2840 lm


Order example:

CRI400x62	-	Power	-	CRI / CCT	-	Beam	-	Color	-	Driver	-	OPTION
CRI400x52	-	32	-	930	-	DIFF	-	9003	-	FIX	-	...



N E R I A 6 0 0

DATASHEET

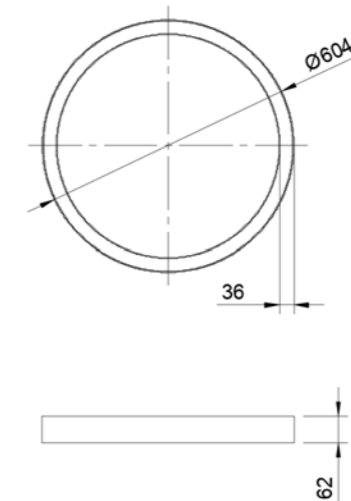

PRODUCT DATA

Size : 604 x 604 x 62 mm
Weight : 3,8 kg
Materials : Housing : Aluminium
 Optic: PMMA
Optic : Satinated diffusor
Light distribution : Direct 60% , indirect 40%
Driver : FIX, DALI, Bluetooth (behind or on ceiling)
Ambient temperature : 0 / + 35 °C
Lifetime : L80B10 - 60 000 hours
IP Rating: IP 20, IP 65 on request
Installation : suspended
Wire lengths : 1500mm
DALI addresses : 1
Visual comfort : UGR <19

NERIA 600 LED



WOOD OPTIONS



BLACK RAL 9003 WHITE RAL 9005 GREY RAL 9006 VARIOUS COLORS

TECHNICAL SPECIFICATION

CODE	POWER	CRI	CCT	LUMEN
CRI600x62	52 W	> 90	3000 K	4970 lm
CRI600x62	52 W	> 90	4000 K	5208 lm
CRI600x62	52 W	> 90	TW (2700 - 6500 K)	4970 lm


Order example:

CRI600x62	-	Power	-	CRI / CCT	-	Beam	-	Color	-	Driver	-	Option
CRI600x62	-	52	-	930	-	DIFF	-	9003	-	FIX	-	...



N E R I A 8 4 0

DATASHEET

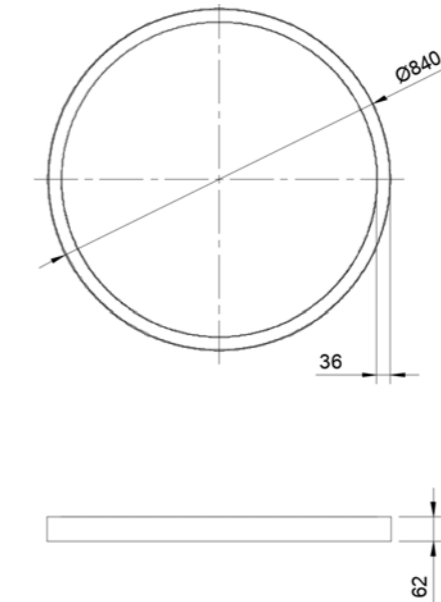

PRODUCT DATA

Size : 840 x 840 x 62 mm
Weight : 4,8 kg
Materials : Housing : Aluminium
 Optic: PMMA
Optic : Satinated diffusor
Light distribution : Direct 60% , indirect 40%
Driver : FIX, DALI, Bluetooth (inside or on ceiling)
Ambient temperature : 0 / + 35 °C
Lifetime : L80B10 - 60 000 hours
IP Rating: IP 20, IP 65 on request
Installation : suspended
Wire lengths : 1500mm
DALI addresses : 1
Visual comfort : UGR <19

NERIA 840 LED



COLOR OPTIONS



BLACK RAL 9003 WHITE RAL 9005 GREY RAL 9006 VARIOUS COLORS

TECHNICAL SPECIFICATION

CODE	POWER	CRI	CCT	LUMEN
CRI840x62	75 W	> 90	3000 K	7100 lm
CRI840x62	75 W	> 90	4000 K	7440 lm
CRI840x62	75 W	> 90	TW (2700 - 6500 K)	7100 lm


Order example:

CRI840x62	-	Power	-	CRI / CCT	-	Beam	-	Color	-	Driver	-	Option
CRI840x62	-	75	-	930	-	DIFF	-	9003	-	FIX	-	XYZ

DATASHEET



N E R I A 1 1 4 0

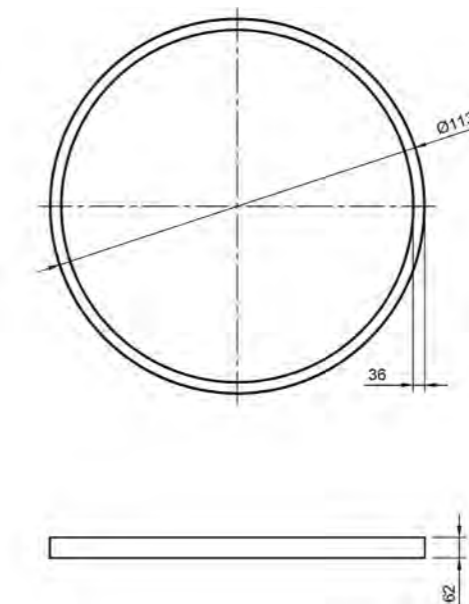

PRODUCT DATA

Size : 1137 x 1137 x 62 mm
 Weight : 7,8 kg
 Materials : Housing : Aluminium
 Optic: PMMA
 Optic : Satinated diffusor
 Light distribution : Direct 65% , indirect 35%
 Driver : FIX, DALI, Bluetooth (inside or on ceiling)
 Ambient temperature : 0 / + 35 °C
 Lifetime : L80B10 - 60 000 hours
 IP Rating: IP 20, IP 65 on request
 Installation : suspended
 Wire lengths : 1500mm
 DALI addresses : 1
 Visual comfort : UGR <19

NERIA 1140 LED



COLOR OPTIONS



TECHNICAL SPECIFICATION

CODE	POWER	CRI	CCT	LUMEN
CRI1140x62	92 W	> 90	3000 K	8520 lm
CRI1140x62	92 W	> 90	4000 K	8928 lm
CRI1140x62	92 W	> 90	TW (2700 - 6500 K)	8520 lm


Order example:

CRI1140x62	-	Power	-	CRI / CCT	-	Beam	-	Wood	-	Driver	-	Option
CRI1140x62	-	92	-	930	-	DIFF	-	OAK	-	FIX	-	...

DATASHEET




N E R I A 1 4 8 0

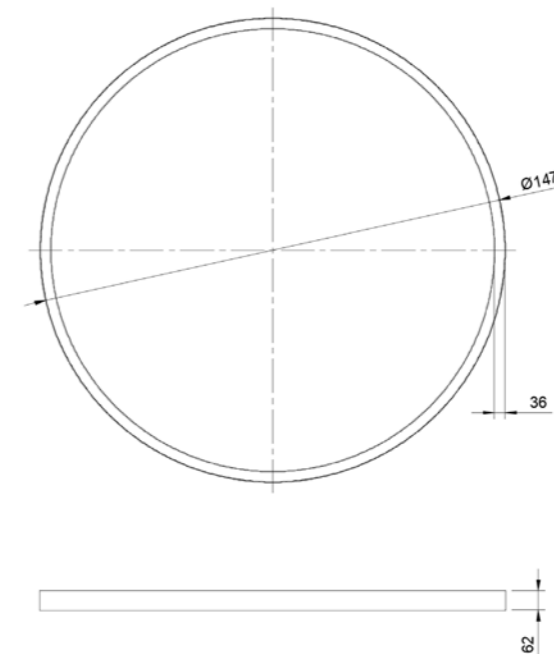

PRODUCT DATA

Size : 1477 x 1477 x 62 mm
 Weight : 11.8 kg
 Materials : Housing : Aluminium
 Optic : PMMA
 Optic : Satinated diffusor
 Light distribution : Direct 65% , indirect 35%
 Driver : FIX, DALI, Bluetooth (inside or on ceiling)
 Ambient temperature : 0 / + 35 °C
 Lifetime : L80B10 - 60 000 hours
 IP Rating: IP 20, IP 65 on request
 Installation : suspended
 Wire lengths : 1500mm
 DALI addresses : 2
 Visual comfort : UGR <19

NERIA 1480 LED



COLOR OPTIONS



TECHNICAL SPECIFICATION

CODE	POWER	CRI	CCT	LUMEN
CRI1480x62	132 W	> 90	3000 K	10650 lm
CRI1480x62	132 W	> 90	4000 K	11160 lm
CRI1480x62	132 W	> 90	TW (2700 - 6500 K)	10650 lm

Order example:

CRI1480x62	-	Power	-	CRI / CCT	-	Beam	-	Color	-	Driver	-	Option
CRI1480x62	-	132	-	930	-	80	-	9003	-	FIX	-	...



SINGLE COLOR

The luminaire can be powder coated in various colors - from glossy to matt surface

DUAL COLOR

We build the luminaire in the way that different colors on outside and inside ring can be applied. This makes the Classic Ring more trendy and fashion.

DUAL MATERIALS

To use 2 different materials on a ring luminaire is not offered a lot in the market. Choose between materials like real brass, copper or brushed aluminium and convert Classic Ring to a highlight for many applications.



**CEILING COVER CCS200
for vertical surface mounting**

CCS200 is a ceiling cover which accommodate the LED driver and electrical connection. The power cable is going vertical straight up from the luminaire. The suspension wires go vertical to the ceiling.

Dimensions: Diameter 200mm, height 40mm

**CEILING COVER CCS200C
for central surface mounting**

CCS200C is placed in the center point of the luminaire. 3 wires plus one power cable is guided from the luminaire to this center point.

Dimensions: Diameter 200mm, height 40mm

**CEILING COVER CCR90
for recessed mounting**

CCR90 is a simple ceiling installation accessory which allows to place the driver inside the ceiling. By screwing the knob the bracket behind the ceiling get fixed. A side screw allows to adjust the power cable even after installation.
Dimensions: Diameter 90mm
Ceiling cutout: 80mm