




A V E N A 4 5 0

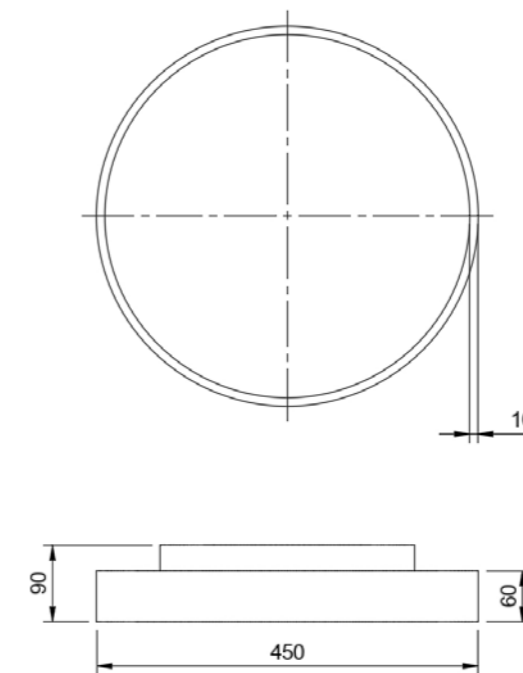

**PRODUCT DATA**

Size : 450 x 60 mm  
 Weight : 2,9 kg  
 Materials : Housing : Aluminium  
 Optic : PMMA  
 Optic : Satinated diffusor, microprisma  
 Light distribution : Direct / Indirect / Aura  
 Driver : FIX, DALI, Bluetooth  
 Ambient temperature : 0 / + 35 °C  
 Lifetime : L90B10 - 60 000 hours  
 IP Rating: IP 40  
 Installation : surface mounted, suspended  
 DALI addresses : 1  
 Visual comfort : UGR <19

**AVENA 450x60 LED**



COLOR OPTIONS



**TECHNICAL SPECIFICATION**

CODE	POWER	CRI	CCT	LUMEN
CIR450x60DIR/AURA	31W	> 90	3000 K	2840 lm
CIR450x60DIR/AURA	31W	> 90	4000 K	2976 lm
CIR450x60DIR/AURA	31W	> 90	2700 - 6500 K	2840 lm


Order example

CIR450x60DIR/AURA	-	Power	-	CRI / CCT	-	Beam	-	Color	-	Driver	-	Option
CIR450x60DIR/AURA	-	31	-	930	-	DIFF	-	9003	-	DALI	-	...



A V E N A 6 0 0

## DATASHEET

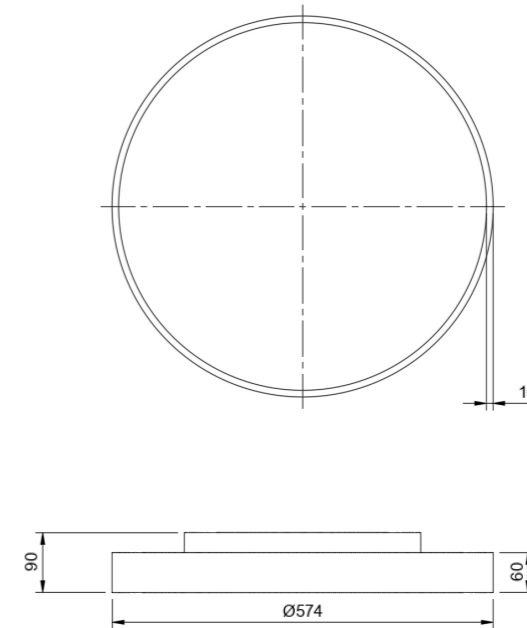

### PRODUCT DATA

**Size :** 574 x 60 mm  
**Weight :** 3,8 kg  
**Materials :** Housing : Aluminium  
 Optic: PMMA  
**Optic :** Satinated diffusor, microprisma  
**Light distribution :** Direct / Indirect / Aura  
**Driver :** FIX, DALI, Bluetooth  
**Ambient temperature :** 0 / + 35 °C  
**Lifetime :** L90B10 - 60 000 hours  
**IP Rating:** IP 40  
**Installation :** surface mounted, suspended  
**DALI addresses :** 1  
**Visual comfort :** UGR <19

### AVENA 600x60 LED



#### COLOR OPTIONS



### TECHNICAL SPECIFICATION

CODE	POWER	CRI	CCT	LUMEN
CIR600x60DIR/AURA	51W	> 90	3000 K	4970 lm
CIR600x60DIR/AURA	51W	> 90	4000 K	5208 lm
CIR600x60DIR/AURA	51W	> 90	2700 - 6500 K	4970 lm


#### Order example

CIR600x60DIR/AURA	-	Power	-	CRI / CCT	-	Beam	-	Color	-	Driver	-	Option
CIR600x60DIR/AURA	-	51	-	930	-	DIFF	-	9003	-	DALI	-	...



A V E N A 9 0 0

## DATASHEET

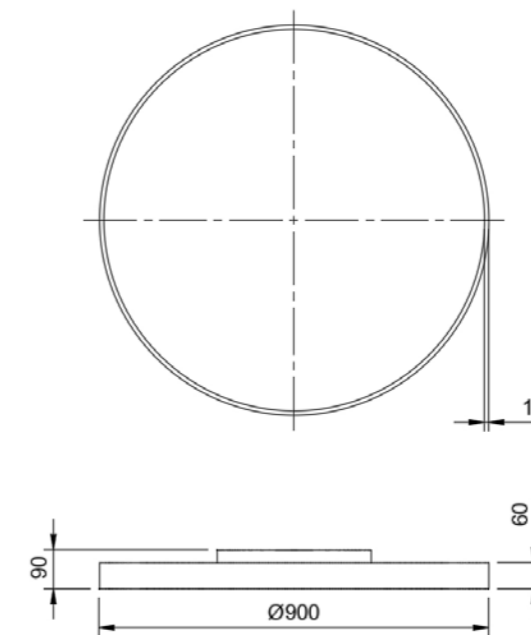

### PRODUCT DATA

**Size :** 900 x 60 mm  
**Weight :** 4,8 kg  
**Materials :** Housing : Aluminium  
 Optic: PMMA  
**Optic :** Satinated diffusor, microprisma  
**Light distribution :** Direct / Indirect / Aura  
**Driver :** FIX, DALI, Bluetooth  
**Ambient temperature :** 0 / + 35 °C  
**Lifetime :** L90B10 - 60 000 hours  
**IP Rating:** IP 40  
**Installation :** surface mounted, suspended  
**DALI addresses :** 1  
**Visual comfort :** UGR <19

### AVENA 900x60 LED



#### COLOR OPTIONS



BLACK RAL 9003   
 WHITE RAL 9005   
 GREY RAL 9006   
 VARIOUS COLORS

### TECHNICAL SPECIFICATION

CODE	POWER	CRI	CCT	LUMEN
CIR600x60DIR/AURA	75 W	> 90	3000 K	7100 lm
CIR600x60DIR/AURA	75 W	> 90	4000 K	7440 lm
CIR600x60DIR/AURA	75 W	> 90	2700 - 6500 K	7100 lm

#### Order example

CIR600x60DIR/AURA	-	Power	-	CRI / CCT	-	Beam	-	Color	-	Driver	-	Option
CIR600x60DIR/AURA	-	75	-	930	-	DIFF	-	9003	-	DALI	-	...