


DATASHEET




L O N A

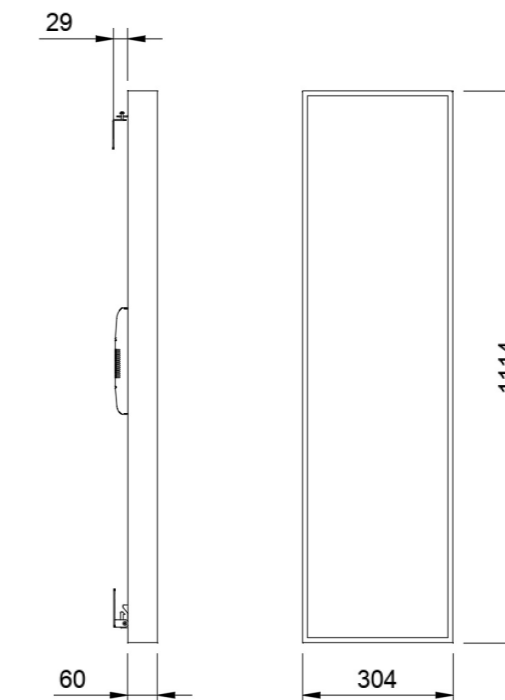

PRODUCT DATA

Size : 304x1114x60mm  
 Weight : 4,8 kg  
 Materials : Housing : Aluminium  
 Optic: PMMA  
 Optic : Satinated diffusor (DIFF), microprisma (MICRO)  
 Light distribution : Direct  
 Driver : FIX, DALI, Bluetooth  
 Ambient temperature : 0 / + 35 °C  
 Lifetime : 90B10 -70 000 hours  
 Installation : surface mounted (SM), suspended  
 IP rating : IP20  
 Visual comfort : UGR <19

LONA LED



COLOR OPTIONS



BLACK RAL 9003    WHITE RAL 9005    GREY RAL 9006    VARIOUS COLORS

TECHNICAL SPECIFICATION

CODE	POWER	CRI	CCT	LUMEN
CREC300x1114x60	45W	> 90	3000 K	4540 lm
CREC300x1114x60	45W	> 90	4000 K	4732 lm
CREC300x1114x60	92W	> 90	3000 K	9060 lm
CREC300x1114x60	92W	> 90	4000 K	9460 lm

Order example

CIR600x60DIR/AURA	-	Power	-	CRI / CCT	-	Beam	-	Color	-	Driver	-	Option
CIR600x60DIR/AURA	-	75	-	930	-	DIFF	-	9003	-	DALI	-	...