




NARRA 400

DATASHEET

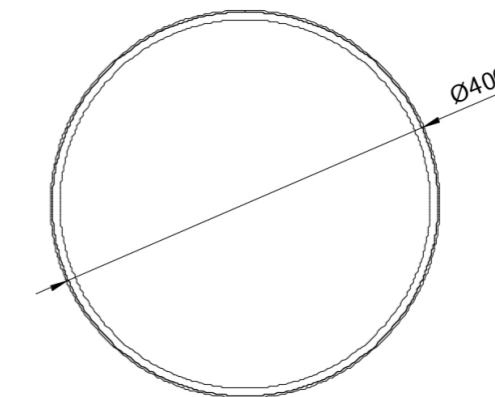

PRODUCT DATA

Size : 400x80mm
Weight : 3,5 kg
Materials : Housing : Aluminium
 Optic: Polycarbonate
Color: graphit, black, white
Optic : Diffuse (DIFF) or Microprisma (MICRO)
Light distribution : Direct
Driver : FIX, DALI, Bluetooth (inside luminaire)
Ambient temperature : -20 / + 35 °C
Lifetime : L90B10 - 60 000 hours
Installation : surface mounted with twist lock - SM
 suspended (ropes, poles) - SUS
IP rating : IP20, IP54
Visual comfort : UGR <19

NARRA 400x80 LED



COLOR OPTIONS



BLACK RAL 9003 WHITE RAL 9005 GREY RAL 9006 VARIOUS COLORS

TECHNICAL SPECIFICATION

CODE	POWER	CRI	CCT	LUMEN
CR400x80	31 W	> 90	3000 K	3410 lm
CR400x80	31 W	> 90	4000 K	3672 lm
CR400x80	31 W	> 90	2700 - 6500 K	3410 lm



Order example:

CR400x80	-	Power	-	CRI / CCT	-	Beam	-	Color	-	Driver	-	Mounting
CR400x80	-	31	-	930	-	DIFF	-	9005	-	DALI	-	SM



NARRA 600


DATASHEET

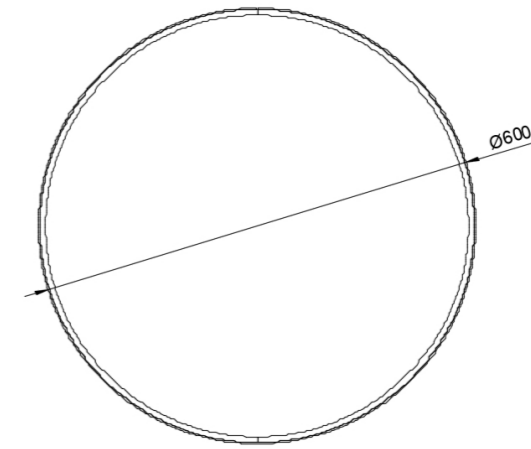

PRODUCT DATA

Size : 600x80mm
Weight : 4,9 kg
Materials : Housing : Aluminium
 Optic: Polycarbonate
Color: graphit, black, white
Optic : Diffuse (DIFF) or Microprisma (MICRO)
Light distribution : Direct
Driver : FIX, DALI, Bluetooth (inside luminaire)
Ambient temperature : -20 / + 35 °C
Lifetime : L90B10 - 60 000 hours
Installation : surface mounted with twist lock - SM
 suspended (ropes, poles) - SUS
IP rating : IP20, IP54
Visual comfort : UGR <19

NARRA 600x80 LED



COLOR OPTIONS



BLACK RAL 9003 WHITE RAL 9005 GREY RAL 9006 VARIOUS COLORS

TECHNICAL SPECIFICATION

CODE	POWER	CRI	CCT	LUMEN
CR600x80	51 W	> 90	3000 K	5400 lm
CR600x80	51 W	> 90	4000 K	5610 lm
CR600x80	51 W	> 90	2700 - 6500 K	5400 lm


Order example:

CR600x80	-	Power	-	CRI / CCT	-	Beam	-	Color	-	Driver	-	Mounting
CR600x80	-	51	-	930	-	DIFF	-	9005	-	DALI	-	SM



NARRA 900

DATASHEET

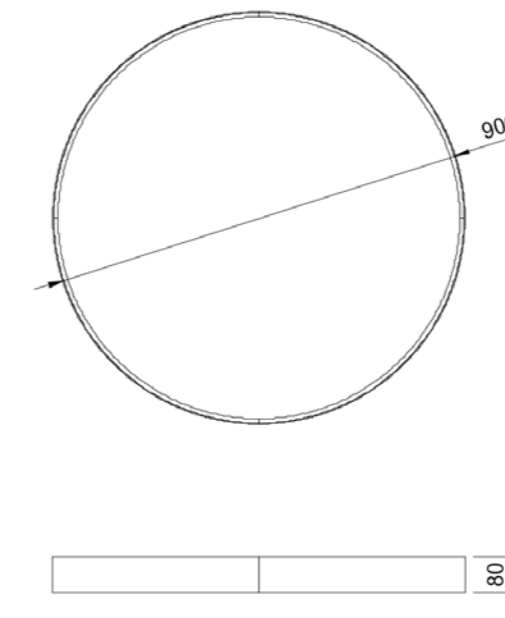

PRODUCT DATA

Size : 900x80mm
 Weight : 6,8 kg
 Materials : Housing : Aluminium
 Optic: Polycarbonate
 Color: graphit, black, white
 Optic : Diffuse (DIFF) or Microprisma (MICRO)
 Light distribution : Direct
 Driver : FIX, DALI, Bluetooth (inside luminaire)
 Ambient temperature : -20 / + 35 °C
 Lifetime : L90B10 - 60 000 hours
 Installation : surface mounted with twist lock - SM
 suspended (ropes, poles) - SUS
 IP rating : IP20, IP54
 Visual comfort : UGR <19

NARRA 900x80 LED



COLOR OPTIONS



TECHNICAL SPECIFICATION

CODE	POWER	CRI	CCT	LUMEN
CR900x80	75 W	> 90	3000 K	7930 lm
CR900x80	75 W	> 90	4000 K	8250 lm
CR900x80	75 W	> 90	2700 - 6500 K	7930 lm

Order example:

CR900x80	-	Power	-	CRI / CCT	-	Beam	-	Color	-	Driver	-	Mounting
CR900x80	-	75	-	930	-	DIFF	-	9005	-	DALI	-	SM